



Natural Gas Detector

GLD 0305 gas leak alarm suits applications mainly in long-time slow gas leakage detection, it adopt microcomputer controlled AD system enable detection work status under low power consumption situation.




Applications

- Low-power-consumption design.
- Continuous detection under poor power supply.
- Field audio and visual.
- Intellectual detection status.

Technical Specifications

Gas to be detected	Natural gas
Solenoid valve control relay	potential free relay
Audible alarm signal	Intermittent
Supply Voltage	240V AC, 50/60 Hz
Power	2VA Max
Protection class	IP 42
Insulation class	II
Operating temperature	-5°C to +35°C
Relative humidity	5% to 95%
Fitting	Wall Mounted

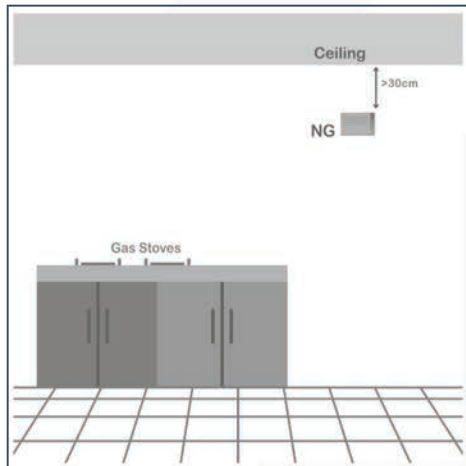

30-107 Krakow, Poland Plac na Stawach 1
 Tel.: +48-12-4267880 | Fax: +48-12-4267882
 Email: office@sitex-polska.com
 Website: www.sitex-polska.com



Exclusive Distributor in the G.C.C.
 Gas Equipment Company L.L.C.
 Loc: Mussafah, Abu Dhabi | Ras Al Khor, Dubai
 Tel: +971 2 673 2623 | +971 4 263 1435
 www.gecollc.com